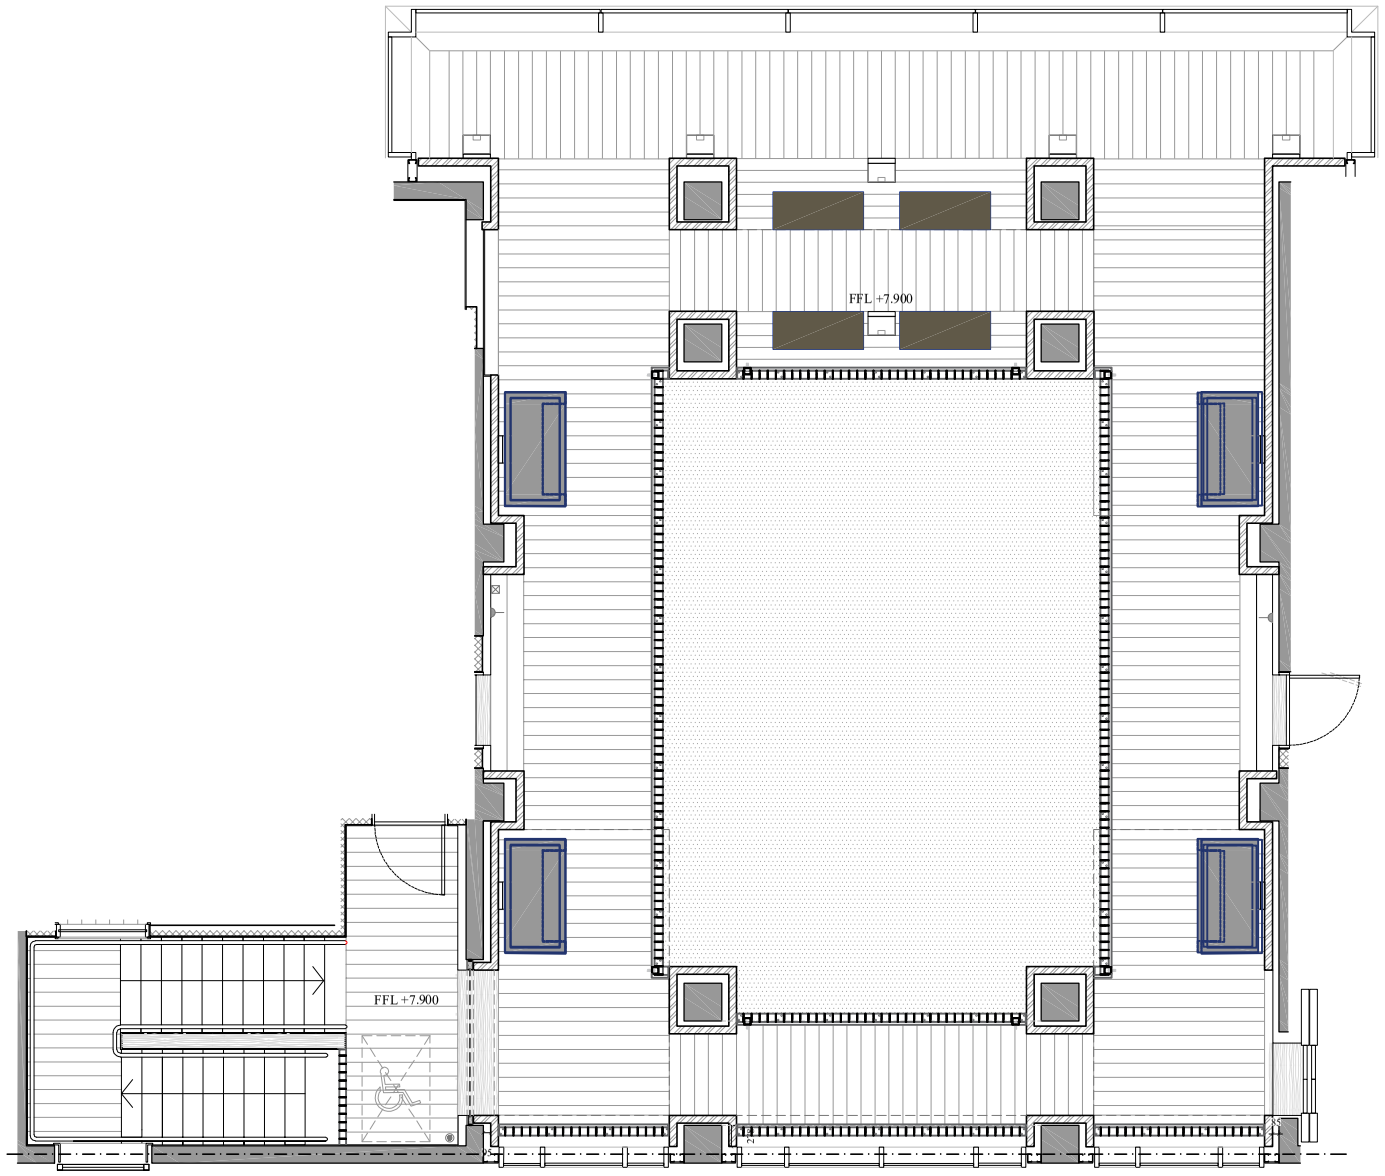

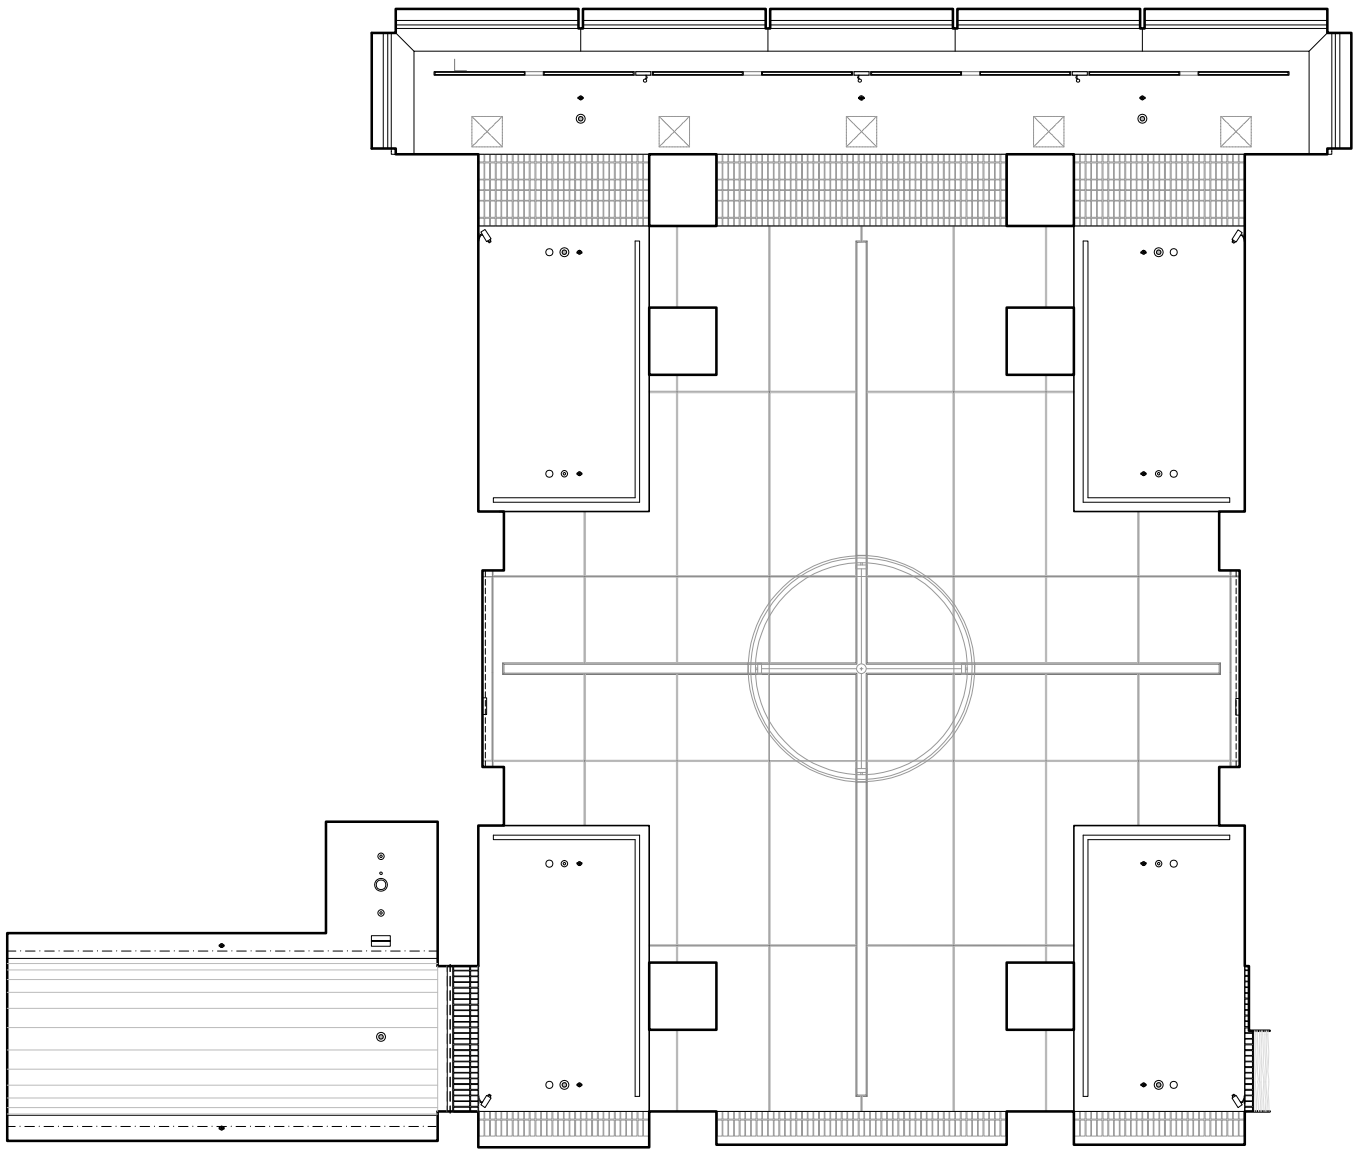

For standard setting out of sockets, switches, access controls and alarms, please refer to **(S) 350** unless otherwise stated.

FLOOR PLAN

- Double switched socket
- Double unswitched socket
- Single switched socket
- Single unswitched socket
- Data outlet
- Un-switched fuse connection
- Fire alarm interface unit
- Floor Box - Entrance
- Manual light switch
- Blind control switch
- BMS environmental logger
- Panic Alarm
- Manual Call Point

CONDUIT

- Floor Box - Typical
- TELECOMS OUTLET
- WIFI ACCESS POINT
- SUSPENDED SOCKET

LIGHTING

- INTERNAL LIGHT
- EXTERNAL LIGHT

ELEVATION

- MAIN FIRE ALARM PANEL
- MANUAL CALL POINT(BREAKGLASS)
- LIGHT AND BUZZER UNIT
- HEAT DETECTOR
- HEB HEAT DETECTOR WITH BEACON BASE

- BMS
- Data
- Lighting
- Power
- Security
- Fire alarm
- Vesda

HB.S	HEAT DETECTOR WITH SOUNDER & BEACON BASE
A	ASPIRATING SMOKE DETECTION POINT
S	POINT SMOKE DETECTOR
SB	SMOKE DETECTOR WITH BEACON BASE
SB.S	SMOKE DETECTOR WITH SOUNDER & BEACON BASE
S.BC	SOUNDER BEACON
FB	FLASHING BEACON (VISUAL ALARM DEVICE - VAD)
VESDA	ASPIRATING SMOKE DETECTOR UNIT
VAS	VOICE ALARM/ PA SURFACE MOUNTED LOUDSPEAKER
DC	DOME CAMERA
EXT. DC	EXTERNAL DOME CAMERA
CCTV	CCTV CAMERA
EXT. CCTV	EXTERNAL CCTV CAMERA
CP	GRADE 3 DUAL -TECH PIR

M	UNSWITCHED FUSED CONNECTION (MOTORISED DOOR)
V	UNSWITCHED FUSED CONNECTION (SOLENOID VALVE)
AC	ACCESS CONTROL CARD READER
C.PIR	GRADE 3 RISCO LUNAR DT AM PIR
GBGU	GREEN BREAK GLASS UNIT
EB	PUSH TO EXIT BUTTON
PPB	TWO BUTTON PUSH PANIC BUTTON
PA	TWO BUTTON PANIC ALARM
D/W CON	DOOR/ WINDOW CONTACT
K	SECURITY KEY PAD
IC	INDUCTION LOOP CABLE
APC	ASSISTANCE ALARM PULL CORD
OB	ASSISTANT ALARM OVERDOOR BUZZER AND INDICATOR UNIT

RL	REASSURANCE LAMP
DIC	DISABLED REFUGE INTERCOM
FG	FLOOR GROMMET
SG/05	LINEAR SUPPLY AIR GRILLE
EXG/03	LINEAR FIXED BLADE EXHAUST AIR GRILLE
EXG/12	SQUARE EXTRACT AIR GRILLE
EXG/14	FIXED BLADES EXHAUST GRILLE
EXG/16	LINEAR EXTRACT AIR GRILLE

(A) Provision per desk seating position 3no. twin switched socket outlets 4no. RJ45 data ports.

(C) Provision per floor box 2no. twin switched socket outlets 4no. RJ45 data ports.

(D) Provision per projector position 1no. twin switched socket outlets 2no. RJ45 data ports.